



SPECIFICATION FOR LCD MODULE

MODULE NO: YB-TG480272S20A-C-A0

Doc.Version:01

Customer Approval:

☐ Accept

☐ Reject

YEEBO	NAME	SIGNATURE	DATE
Prepare	Mechanical Engineer	陳長吉	2020-7-15
Check	Electronic Engineer	何康宇	2020-7-15
Verify			
Approval		孫亞南	2020/7/15

☐ APPROVAL FOR SPECIFICATIONS ONLY

☒ APPROVAL FOR SPECIFICATIONS AND SAMPLE

WIMRD005-02-D

1. Revision History

[illegible]

2. Table of Contents:

NO	CONTENTS	PAGE
1	Revision History	1
2	Table of Contents	2
3	Module Numbering System	3
4	General Specification	4
5	LCM drawing	5
6	Electrical Characteristics	6
7	Optical Characteristics	10
8	Interface Pin Assignment	12
9	Block Diagram	13
10	Backlight	13
11	Standard Specification for Reliability	14
12	Specification of Quality Assurance	16
13	Handling Precaution	24
14	Guarantee	24

3. Module Numbering System:

(Example)

YB-TG240320S01D-T-A0

Sample Version: A0~Z0

T: With Resistive Touch panel
C: With Capacitive Touch panel
N: Without Touch panel

Version: A~Z

Serial No: 01~99

S: STD Product
C: Customer Made

Display Function:
Segment Number of Segment
Characters Lines of Character
Column and Row of Graphic
Length * Width of Other

LCM Display Type
C: Character Type ;
G: Graphic Type ;
GB: Graphic Black/White Type ; (For E-paper)
GC: Graphic Color Type ; (For E-paper)
S: Segment Type

LCD Model:
C: CSTN; T: TFT; L: LTPS; O: OLED;
P: PLED; S: B/W STN; E: E-paper ;
Y: Yeetek; N: Others;

YEEBO

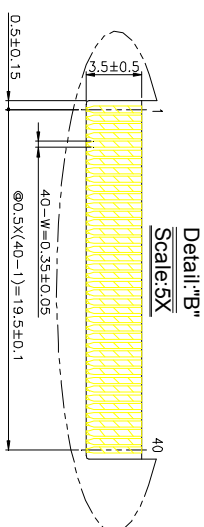


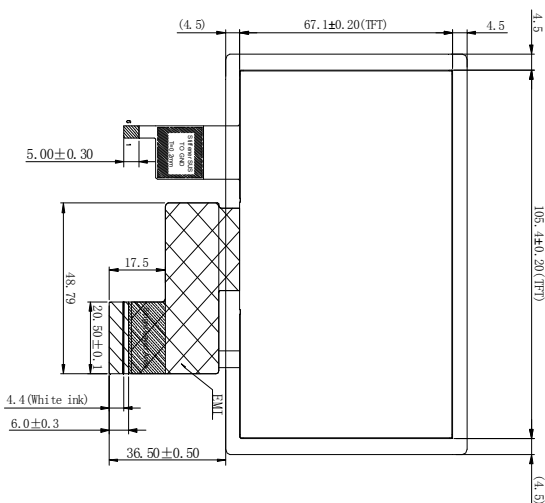
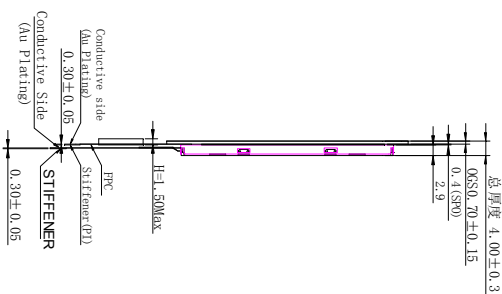
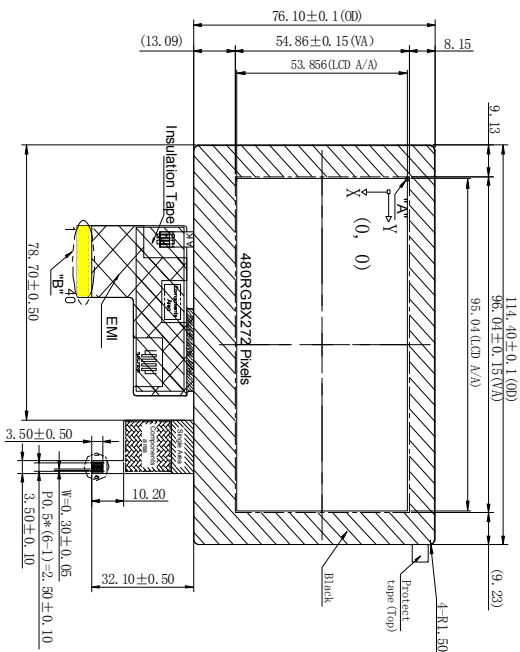
4. General Specification:

ITEM	CONTENTS
Module Size	114.40(W) *76.10 (H) *3.85(T)
Outline of Module Size(TFT)	105.4 (W) *67.1 (H) *2.9 (T) mm
Outline of Module Size(TP)	114.40(W) *76.10 (H) *0.70(D)
Display Size(Diagonal)	4.3 inch
Display Format	480(RGB)* 272 Pixels
Active Area(TFT)	95.04(W) * 53.856(H) mm
View Area of (TP)	96.04(W) *54.86(H)
Dots Pitch	0.198*0.198 mm
LCD Type	TFT (16.7M)/ Transmissive / Normal Black
Viewing Angle	Free
Controller IC	SC7283
TP IC	ILI2117A
Interface	I ² C
TP Sensor Number	10(X)*18(Y)
Touch point	5-Point
Hardness	≥6H
Weight(g)	≈57.0


5. LCM drawing:



Rec.	Revision content description	Date
#1	FIRST ISSUE	2020-05-20
02	Modify the number of LED	2020-07-15

TP P1N ASSIGNMENT	
No.	Symbol
1	VDD
2	RESET
3	INT
4	SCL
5	SDA
6	GND

LCD MODULE
FPC PIN OUT

Specification:

1. Display mode: 4.3" TFT (16.7M) / Transmissive / Normal Black
2. Viewing Direction: Free
3. Controller IC: SC7283 or Compatible
4. Backlight: 12 chips White LED 
5. Glass Type: OG+S+TFT
6. Channel NO.:10(X)x18(Y)
7. TP Drive IC: Is:IL1217A
8. Hardness:>6H,
9. Interface: I/C
10. Touch Panel: 5-Point
11. Operating temperature: -20°C to +70°C
12. Storage temperature: -30°C to +80°C
13. Unspecified tolerance: ±0.30mm.
13. ROHS compliant

	MOD. Name		YB-TG480272S19A-C-A				Sheet 1
	DESIGNED	CHECKED	VERIFIED	APPROVED	FILE NAME		Of 1
							Count Dwg.
	UNIT	SIZE	SCALE				
mm	A4	N-T-S					

6. Electrical Characteristics

6-1 Absolute Maximum Ratings

6-1-1 TFT Absolute Maximum Ratings

(Ta=25°C VSS=0V)

Item	Symbol	Min.	Type	Max.	Unit	Remark
Power Supply voltage	VDD	-0.5		+4.0	Volt	
Operating Temperature	Topr	-20	-	70	°C	
Storage Temperature	Tstg	-30	-	80	°C	

Note1: Absolute maximum rating is the limit value beyond which the IC maybe broken.
They do not assure operations.

6-1-2 TP Absolute Maximum Ratings

(Ta=25°C VSS=0V)

Item	Symbol	Min	Typ	Max	Unit
System power supply voltage	VDD			3.6	V
High voltage power supply	VPVDD_CP		3.6	3.7	V
Analog input voltage	VINANA			VDD	V
Digital input voltage	VINDIG			5	V
Storage temperature	TSTG	-40		150	°C

Notes: Stresses above those listed in Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only and does not imply functional operation of the device. Exposure to absolute maximum ratings for extended periods may affect device reliability.

6-2 Operating Conditions

6-2-1 TFT Operating Conditions


(Ta=25°C)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Power Supply voltage	VDD	-	3.0	3.3	3.6	Volt
Level Input Voltage	VIH	-	0.7*VDD	-	VDD	Volt
	VIL	-	GND		0.3*VDD	Volt
Power Supply Current for LCM	IDD	-	-	27	40.5	mA

Note1:GND=0V


6-3 Timing Characteristics

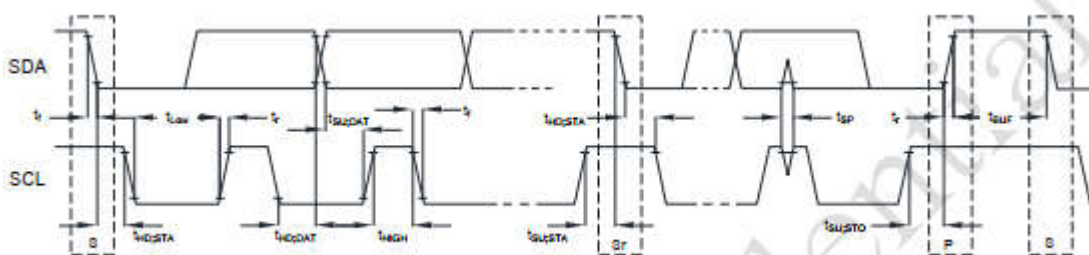6-3-1 TP I²C interface



Symbol	Parameter	100KHz			400KHz		
		Min	Max	Unit	Min	Max	Unit
f_{SCL}	SCL clock frequency	0	100	kHz	0	400	KHz
$t_{HD,STA}$	Hold time (repeated) START condition. After this period, the first clock pulse is generated	4.0	—	μs	0.6	—	μs
t_{LOW}	LOW period of the SCL clock	4.7	—	μs	1.3	—	μs
t_{HIGH}	HIGH period of the SCL clock	4.0	—	μs	0.6	—	μs
$t_{SU,STA}$	Set-up time for a repeated START condition	4.7	—	μs	0.6	—	μs
$t_{HD,DAT}$	Data hold time	0	3.45	μs	0	0.9	μs
$t_{SU,DAT}$	Data set-up time	250	—	ns	100	—	ns
t_r	Rise time of both SDA and SCL signals	—	1000	ns	—	300	ns
t_f	Fall time of both SDA and SCL signals	—	300	ns	—	300	ns
$t_{SU,STO}$	Set-up time for STOP condition	4.0	—	μs	0.6	—	μs
t_{BUF}	Bus free time between a STOP and START condition	4.7	—	μs	1.3	—	μs

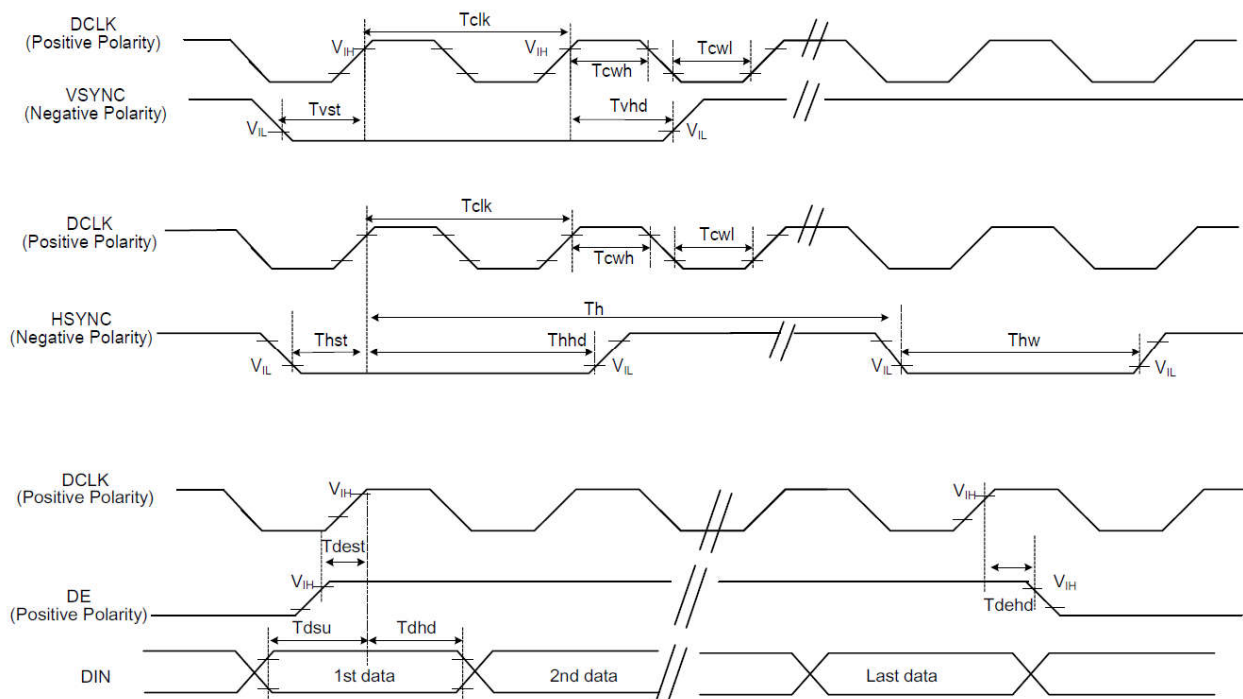6-3-2 TFT Clock and data input timing diagram




6-3-2RGB input timing table

6-3-2-1 Parallel 24-bit RGB timing table

480RGB X 272 Resolution Timing Table							
Item		Symbol	Min.	Typ.	Max.	Unit	Remark
DCLK Frequency		Fclk	8	9	12	MHz	
DCLK Period		Tclk	83	111	125	ns	
HSYNC	Period Time	Th	485	531	598	DCLK	
	Display Period	Thdisp		480		DCLK	
	Back Porch	Thbp	3	43	43	DCLK	By H_BLANKING setting
	Front Porch	Thfp	2	8	75	DCLK	
	Pulse Width	Thw	2	4	43	DCLK	
VSYNC	Period Time	Tv	276	292	321	HSYNC	
	Display Period	Tvdisp		272		HSYNC	
	Back Porch	Tvbp	2	12	12	HSYNC	By V_BLANKING setting
	Front Porch	Tvfp	2	8	37	HSYNC	
	Pulse Width	Tvw	2	4	12	HSYNC	

Note: It is necessary to keep Tvbp =12 and Thbp =43 in sync mode. DE mode is unnecessary to keep it.

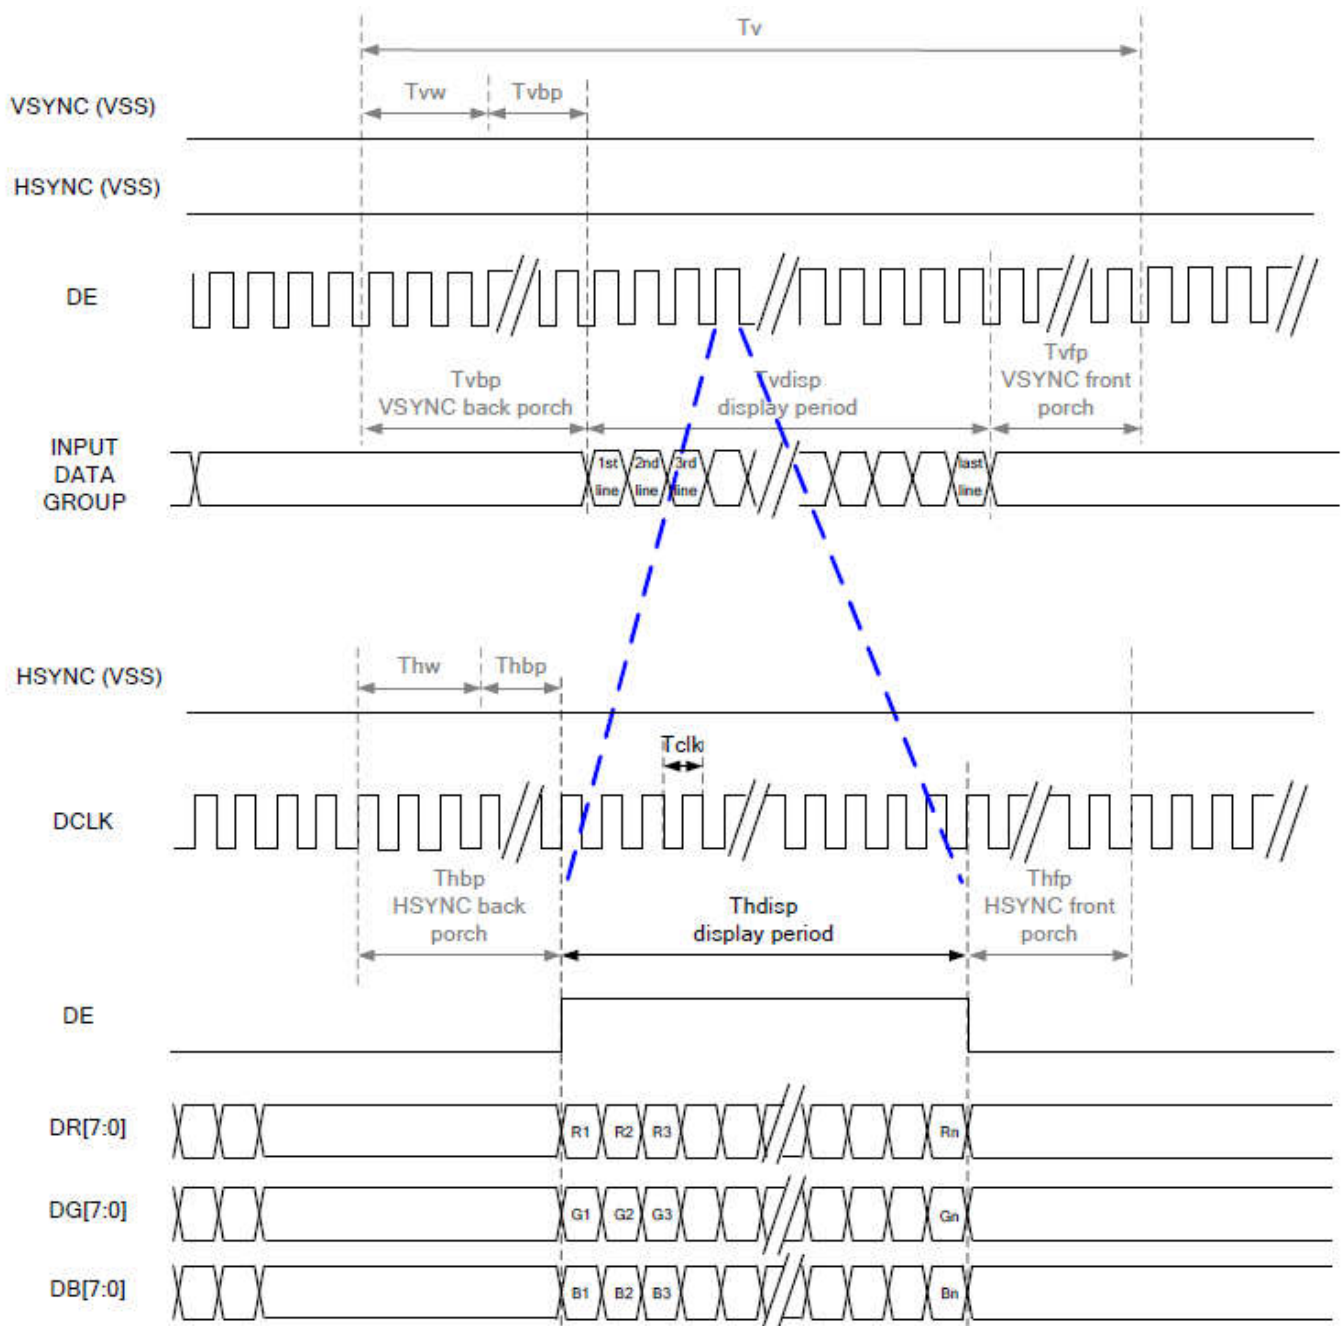6-3-3 TFT DE mode timing diagram



RGB Mode Selection Table	DCLK	HSYNC	VSYNC	DE
SYNC - DE Mode	Input	Input	Input	Input
SYNC Mode	Input	Input	Input	GND
DE Mode	Input	GND	GND	Input

7. Optical Characteristics:

Item		Symbol	Conditions	Specifications			Unit	Note
				Min	Typ	Max		
Transmittance		T(%)	—	-	6.6	-	-	-
Contrast Ratio		CR	$\Theta = 0$ Normal Viewing angle	640	800	-		(1) (2)
Response time		TR+TF	—	-	30	40	ms	(1) (3)
Viewing angle	Hor.	Θ_{x+}	$CR \geq 10$	-	80	-	deg.	-
		Θ_{x-}		-	80	-		
	Ver.	Θ_{y+}		-	80	-		
		Θ_{y-}		-	80	-		


Measuring Condition

1. Measuring surrounding: dark room
2. Ambient temperature: $25 \pm 2^\circ\text{C}$
3. 30 min. Warm-up time.

Color of CIE Coordinate:

Item		Symbol	Condition	Min.	Typ.	Max.
Chromaticity Coordinates (Transmissive)	Red	x	$\theta = 0^\circ$ Backlight Color Degree	0.563	0.613	0.663
		y		0.302	0.352	0.402
	Green	x		0.337	0.387	0.437
		y		0.510	0.560	0.610
	Blue	x		0.095	0.145	0.195
		y		0.073	0.123	0.173
	White	x		0.290	0.340	0.390
		y		0.310	0.360	0.410

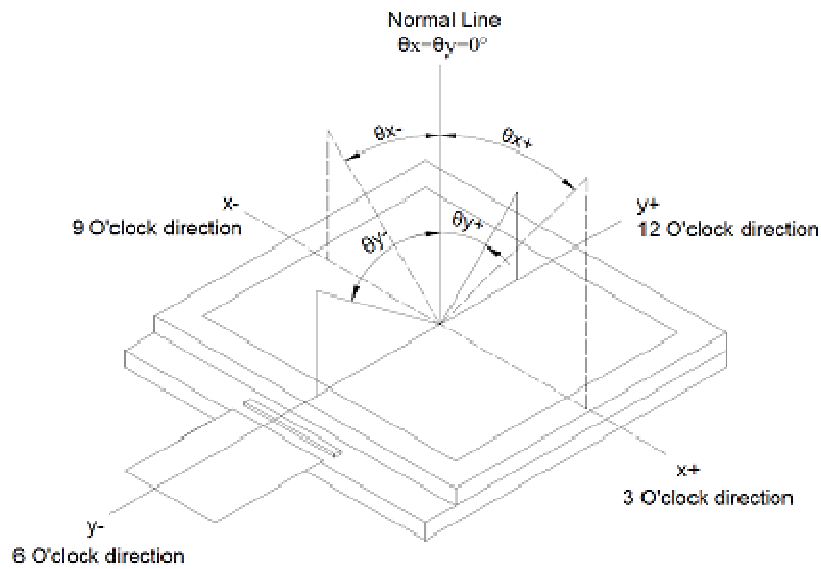
Note (1) Definition of Viewing Angle :



Note (2) Definition of Contrast Ratio(CR) :
measured at the center point of panel

$$\text{Contrast ratio (CR)} = \frac{\text{Photo detector output when LCD is at "White" state}}{\text{Photo detector output when LCD is at "Black" state}}$$

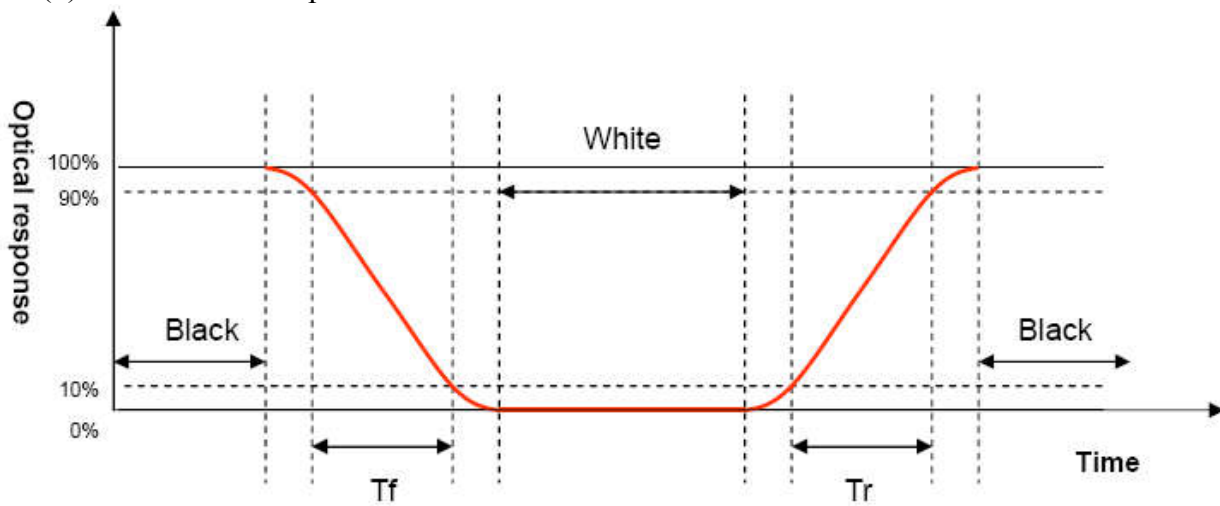Note (3) Definition of Response Time : Sum of TR and TF



8. Interface Pin Assignment:


8-1 TFT FPC Interface

No.	Symbol	Function
1	LEDK	Cathode of LED backlight
2	LEDA	Anode of LED backlight
3	GND	GND Power ground
4	VDD	Power voltage.
5~12	R0~ R7	Digital data input.R0(LSB),R7(MSB)
13~20	G0~ G7	Digital data input.G0(LSB),G7(MSB)
21~28	B0~ B7	Digital data input.B0(LSB),B7(MSB)
29	GND	Power ground
30	DCLK	Data clock signal input
31	DISP	Display on/off mode control. (a) DISP=L, standby mode. (b) DISP=H, normal display mode.
32	HSYNC	Horizontal sync signal input
33	VSNC	Vertical sync signal input
34	DE	Data enable input.
35	NC	No connection
36	GND	Power ground
37	NC/XR	No connection, reserve for TP interface.
38	NC/YD	No connection, reserve for TP interface.
39	NC/XL	No connection, reserve for TP interface.
40	NC/YU	No connection, reserve for TP interface.

8-2 TP FPC Interface

No.	Symbol	I/O	Function
1	VDD-CTP	P	Power Voltage for digital circuit
2	RESET-CTP	I	System reset signal input, active low
3	INT-CTP	O	Indicate coordinate data ready
4	SCL-CTP	I/O	I2C Serial Clock
5	SDA-CTP	I/O	I2C Serial Data
6	GND	P	Power Voltage for digital circuit

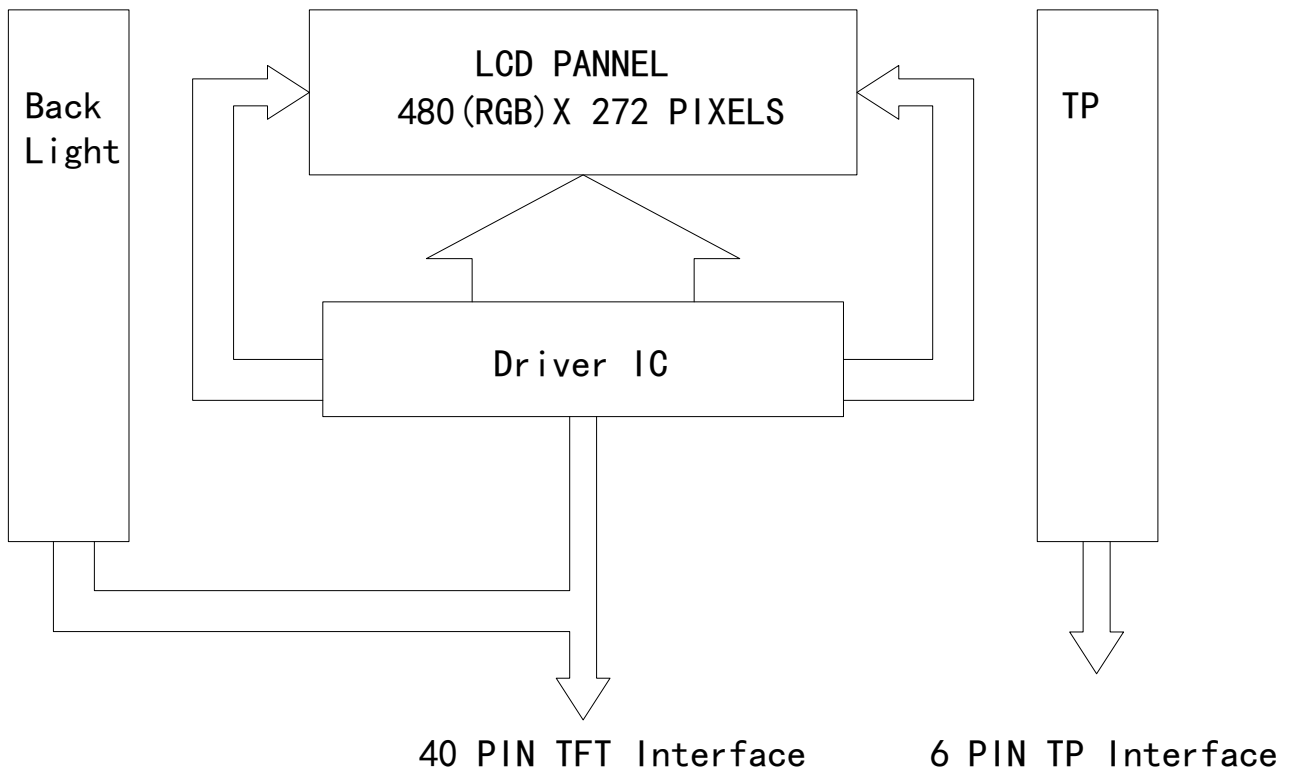9. Block Diagram:



10. Backlight:

1. Standard Lamp Styles (Edge Lighting Type):
The LED chips are distributed over the edge light area of the illumination unit, which gives the less power consumption:

2. The Main Advantages of the LED Backlight are as following:

2.1 The brightness of the backlight can simply be adjusted.
By a resistor or a potentiometer.

3. Data About LED Backlight:

(Ta=25°)



PARAMETER	Sym.	Min.	Typ.	Max.	Unit	Test Condition	Note
Supply Current	I	-	40	-	mA	-	
Supply Voltage	V	16.2	18.6	19.5	V	If=40mA	
Reverse Voltage	VR	-	-	5.0	V	-	
Luminous Intensity for LCM	Iv	510	595	-	Cd/m ²	If=40mA	2
Uniformity for LCM	-	70	-	-	%		3
Life Time	-	20000	-	-	Hr.		4
Color	White						

NOTE:

1. Backlight Only
2. Average Luminous Intensity of P1-P9
3. Uniformity = Min/Max * 100%
4. LED life time defined as follows: The final brightness is at 50% of original brightness

Measured Method: (X*Y: Light Area)

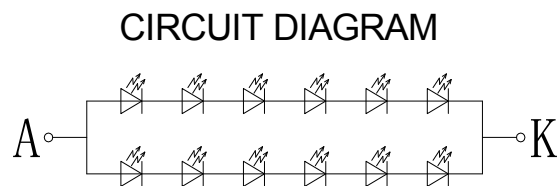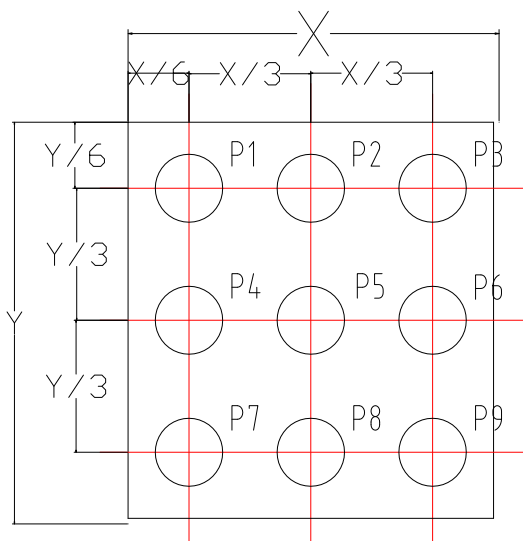Internal Circuit Diagram



(Effective spatial Distribution)

Using aperture of 1°, distance 50cm.

11. Standard Specification for Reliability:

11-1. Standard Specifications for Reliability of LCD Module

No	Item	Description
01	High temperature operation	The sample should be allowed to stand at 70°C for 120 hours under driving condition and then returning it to normal temperature condition, and allowing it stand for 2 hours.
02	Low temperature operation	The sample should be allowed to stand at -20°C for 120 hours under driving condition and then returning it to normal temperature condition, and allowing it stand for 2 hours.
03	High temperature storage	The sample should be allowed to stand at 80°C for 240 hours under no-load condition, and then returning it to normal temperature condition, and allowing it stand for 2 hours.
04	Low temperature storage	The sample should be allowed to stand at -30°C for 240 hours under no-load condition, then returning it to normal temperature condition, and allowing it stand for 2 hours.
05	Moisture storage	The sample should be allowed to stand at 60°C,90%RH MAX for 240 hours under no-load condition, then taking it out and drying it at normal temperature for 2 hours.
06	Thermal shock storage	The sample should be allowed to stand the following 10 cycles : -30°C for 30 minutes → normal temperature for 5 minutes → +80°C for 30 minutes → normal temperature for 5 minutes, as one cycle.
07	Packing vibration	Frequency range : 10Hz ~ 55Hz Amplitude of vibration : 1.5mm Sweep time: 12 min X,Y,Z 2 hours for each direction.
08	Packing drop test	According to ISTA 1A 2001.
09	Electrical Static Discharge	Air: ±6KV 150pF/330Ω 5 times
		Contact: ±4KV 150pF/330Ω 5 time

*Sample size for each test item is 3~5pcs

11 - 2. Testing Conditions and Inspection Criteria

For the final test the testing sample must be stored at room temperature for 24 hours, after the tests listed in Table 11.2, Standard specifications for Reliability have been executed in order to ensure stability.

No	Item	Test Model	In section Criteria
01	Current Consumption	Refer To Specification	The current consumption should conform to the product specification.
02	Contrast	Refer To Specification	After the tests have been executed, the contrast must be larger than half of its initial value prior to the tests.
03	Appearance	Visual inspection	Defect free.

11- 3. MTBF

MTBF	Functions, performance, appearance, etc. shall be free from remarkable deterioration within 50,000 hours under ordinary operating and storage conditions room temperature ($25\pm5^{\circ}\text{C}$), normal humidity ($50\pm10\%$ RH), and in area not exposed to direct sun light.
------	---

12. Specification of Quality Assurance:

12-1. Purpose

This standard for Quality Assurance should affirm the quality of LCD module products to supply to purchaser by YEEBO CORPORATION (Supplier).

12-2. Standard for Quality Test

a. Inspection:

Before delivering, the supplier should take the following tests, and affirm the quality of product.

b. Electro-Optical Characteristics:

According to the individual specification to test the product.

c. Test of Appearance Characteristics:

According to the individual specification to test the product.

d. Test of Reliability Characteristics:

According to the definition of reliability on the specification for testing products.

e. Delivery Test:

Before delivering, the supplier should take the delivery test.

(i) Test method: According to **ISO2859-1**.General Inspection Level II take a single time.

(ii) The defects classify of AQL as following:

Major defect: AQL = 0.65

Minor defect: AQL = 2.5

Total defects: AQL = 2.5

12-3. Non- conforming Analysis & Deal With Manners

a. Non- conforming Analysis:

(i) Purchaser should supply the detail data of non- conforming sample and the non- conforming.

(ii) After accepting the detail data from purchaser, the analysis of non- conforming should be finished in two weeks.

(iii) If supplier can not finish analysis on time, must announce purchaser before 3 days.

b. Disposition of non- conforming:

(i) If find any product defect of supplier during assembly time, supplier must change the good product for every defect after recognition.

(ii) Both supplier and customer should analyze the reason and discuss the disposition of non- conforming when the reason of nonconforming is not sure.

12-4. Agreement items

Both sides should discuss together when the following problems happen.

a. There is any problem of standard of quality assurance, and both sides should think that must be modified.

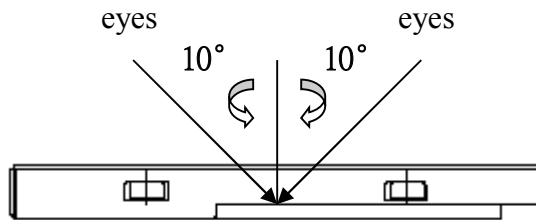
b. There is any argument item which does not record in the standard of quality assurance.

c. Any other special problem.


12-5. Standard of The Product Appearance Test

a. Manner of appearance test:

- (i) The test must be under $20W \times 2$ or $40W$ fluorescent light, and the distance of view must be at $30 \pm 5cm$.
- (ii) When test the model of transmissive product must add the reflective plate.
- (iii) The test direction is base on around 10° of vertical line.
- (iii) Temperature: $25 \pm 5^\circ C$ Humidity: $60 \pm 10\% RH$



(iv) Definition of area:

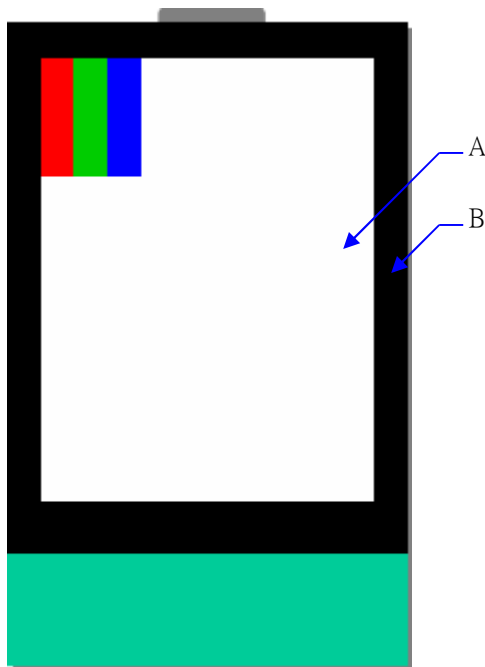

A. Area: Viewing area.

B. Area: Out of viewing area.

(Outside viewing area)

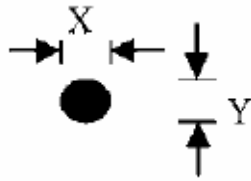
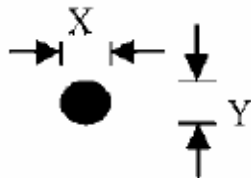
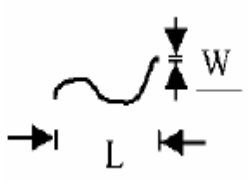
b. Basic principle:



- (i) It will accord to the AQL when the standard can not be described.
- (ii) The sample of the lowest acceptable quality level must be discussed by both supplier and customer when any dispute happened.
- (iii) Must add new item on time when it is necessary.




c. Standard of inspection: (Unit: mm)

12-6. Inspection specification



Defect out of viewing area can be neglected.


NO	Item	Criterion	AQL															
01	Electrical Testing	1.1 Missing vertical, horizontal segment, segment contrast defect. 1.2 Missing character, dot or icon. 1.3 Display malfunction. 1.4 No function or no display. 1.5 Current consumption exceeds product specifications. 1.6 LCD viewing angle defect. 1.7 Mixed product types. 1.8 Flicker	0.65															
02	Black or White spots or Bright spots or Color spots on LCD (Display only)	2.1 Dot dimension as below drawing: $\Phi = (X+Y) / 2$ <div></div> <table><tr><th>Size(mm)</th><th>Acceptable Q'ty</th></tr><tr><td>$\Phi \leq 0.20$</td><td>Accept no dense</td></tr><tr><td>$0.20 < \Phi \leq 0.30$</td><td>3</td></tr><tr><td>$0.30 < \Phi \leq 0.50$</td><td>2</td></tr><tr><td>$0.50 < \Phi$</td><td>0</td></tr></table> 2.2 Not visible through 5% ND filter * Densely spaced: No more than two spots within5mm.	Size(mm)	Acceptable Q'ty	$\Phi \leq 0.20$	Accept no dense	$0.20 < \Phi \leq 0.30$	3	$0.30 < \Phi \leq 0.50$	2	$0.50 < \Phi$	0	2.5					
Size(mm)	Acceptable Q'ty																	
$\Phi \leq 0.20$	Accept no dense																	
$0.20 < \Phi \leq 0.30$	3																	
$0.30 < \Phi \leq 0.50$	2																	
$0.50 < \Phi$	0																	
03	LCD and Touch Panel black spots, white spots, contamination (non – display)	3.1 Round type: As following drawing $\Phi = (X+Y) / 2$ <div></div> <table><tr><th>Size(mm)</th><th>Acceptable Q'ty</th></tr><tr><td>$\Phi \leq 0.20$</td><td>Accept no dense</td></tr><tr><td>$0.25 < \Phi \leq 0.50$</td><td>3</td></tr><tr><td>$0.50 < \Phi \leq 0.80$</td><td>2</td></tr><tr><td>$0.80 < \Phi \leq 1.5$</td><td>1</td></tr><tr><td>$1.5 < \Phi$</td><td>0</td></tr></table> * Densely spaced: No more than two spots within 5mm.	Size(mm)	Acceptable Q'ty	$\Phi \leq 0.20$	Accept no dense	$0.25 < \Phi \leq 0.50$	3	$0.50 < \Phi \leq 0.80$	2	$0.80 < \Phi \leq 1.5$	1	$1.5 < \Phi$	0	2.5			
Size(mm)	Acceptable Q'ty																	
$\Phi \leq 0.20$	Accept no dense																	
$0.25 < \Phi \leq 0.50$	3																	
$0.50 < \Phi \leq 0.80$	2																	
$0.80 < \Phi \leq 1.5$	1																	
$1.5 < \Phi$	0																	
		3.2 Line type: (As following drawing) <div></div> <table><tr><th>Length(mm)</th><th>Width(mm)</th><th>Acceptable Q'ty</th></tr><tr><td>$L \leq 10$</td><td>$W \leq 0.1$</td><td>Accept no dense</td></tr><tr><td>$L \leq 10.0$</td><td>$0.1 < W \leq 0.25$</td><td>4</td></tr><tr><td>$L > 10$</td><td>----</td><td>Rejection</td></tr><tr><td>----</td><td>$0.25 < W$</td><td>Rejection</td></tr></table> * Densely spaced: No more than two lines within 5mm.	Length(mm)	Width(mm)	Acceptable Q'ty	$L \leq 10$	$W \leq 0.1$	Accept no dense	$L \leq 10.0$	$0.1 < W \leq 0.25$	4	$L > 10$	----	Rejection	----	$0.25 < W$	Rejection	2.5
Length(mm)	Width(mm)	Acceptable Q'ty																
$L \leq 10$	$W \leq 0.1$	Accept no dense																
$L \leq 10.0$	$0.1 < W \leq 0.25$	4																
$L > 10$	----	Rejection																
----	$0.25 < W$	Rejection																

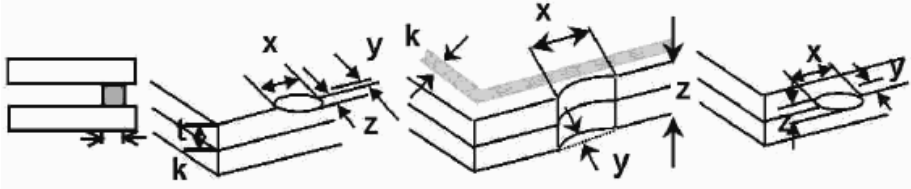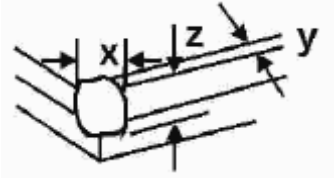NO	Item	Criterion		AQL																		
04	Polarizer bubbles	If bubbles are visible, judge using black spot specifications, not easy to find, must check in specify direction	<table><tr><th>Size Φ(mm)</th><th>Acceptable Q'ty</th></tr><tr><td>Φ ≤ 0.20</td><td>Accept no dense</td></tr><tr><td>0.20 < Φ ≤ 0.50</td><td>4</td></tr><tr><td>0.50 < Φ ≤ 1.00</td><td>3</td></tr><tr><td>1.00 < Φ</td><td>0</td></tr><tr><td>Total Q'ty</td><td>4</td></tr></table>	Size Φ(mm)	Acceptable Q'ty	Φ ≤ 0.20	Accept no dense	0.20 < Φ ≤ 0.50	4	0.50 < Φ ≤ 1.00	3	1.00 < Φ	0	Total Q'ty	4	2.5						
Size Φ(mm)	Acceptable Q'ty																					
Φ ≤ 0.20	Accept no dense																					
0.20 < Φ ≤ 0.50	4																					
0.50 < Φ ≤ 1.00	3																					
1.00 < Φ	0																					
Total Q'ty	4																					
05	Scratches	Follow NO.3 -2 Line Type.																				
06	Mura	Not visible through 5% ND filter in 50% gray.		2.5																		
07	Chipped glass	<p>Symbols: x: Chip length y: Chip width z: Chip thickness k: Seal width t: Glass thickness a: LCD side length L: Electrode pad length 7.1 General glass chip: 7.1.1 Chip on panel surface and crack between panels:</p>  <table><tr><td>z: Chip thickness</td><td>y: Chip width</td><td>x: Chip length</td></tr><tr><td>$Z \leq 1/2t$</td><td>Not over viewing area</td><td>$x \leq 1/8a$</td></tr><tr><td>$1/2t < z \leq 2t$</td><td>Not exceed 1/3k</td><td>$x \leq 1/8a$</td></tr></table> <p>⊙ Unit: mm ⊙ If there are 2 or more chips, x is the total length of each chip</p> <p>7.1.2 Corner crack:</p>  <table><tr><td>z: Chip thickness</td><td>y: Chip width</td><td>x: Chip length</td></tr><tr><td>$Z \leq 1/2t$</td><td>Not over viewing area</td><td>$x \leq 1/8a$</td></tr><tr><td>$1/2t < z \leq 2t$</td><td>Not exceed 1/3k</td><td>$x \leq 1/8a$</td></tr></table> <p>⊙ Unit: mm ⊙ If there are 2 or more chips, x is the total length of each chip</p>		z: Chip thickness	y: Chip width	x: Chip length	$Z \leq 1/2t$	Not over viewing area	$x \leq 1/8a$	$1/2t < z \leq 2t$	Not exceed 1/3k	$x \leq 1/8a$	z: Chip thickness	y: Chip width	x: Chip length	$Z \leq 1/2t$	Not over viewing area	$x \leq 1/8a$	$1/2t < z \leq 2t$	Not exceed 1/3k	$x \leq 1/8a$	2.5
z: Chip thickness	y: Chip width	x: Chip length																				
$Z \leq 1/2t$	Not over viewing area	$x \leq 1/8a$																				
$1/2t < z \leq 2t$	Not exceed 1/3k	$x \leq 1/8a$																				
z: Chip thickness	y: Chip width	x: Chip length																				
$Z \leq 1/2t$	Not over viewing area	$x \leq 1/8a$																				
$1/2t < z \leq 2t$	Not exceed 1/3k	$x \leq 1/8a$																				

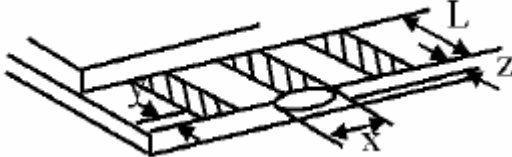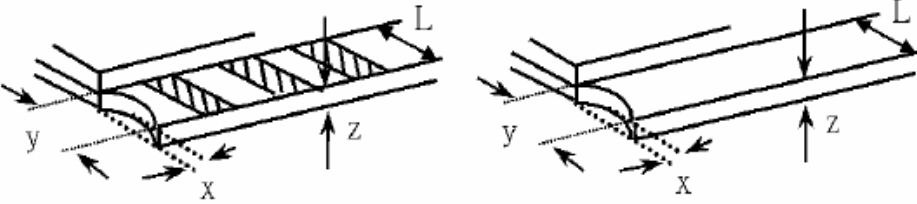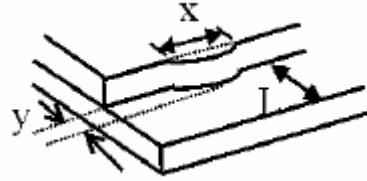NO	Item	Criterion	AQL																
08	Glass crack	<p>Symbols: x: Chip length y: Chip width z: Chip thickness k: Seal width t: Glass thickness a: LCD side length L: Electrode pad length</p> <p>8.1 Protrusion over terminal: 8.1.1 Chip on electrode pad:</p>  <table><tr><td>y: Chip width</td><td>x: Chip length</td><td>z: Chip thickness</td></tr><tr><td>$y \leq 0.5\text{mm}$</td><td>$x \leq 1/8a$</td><td>$0 < z \leq t$</td></tr></table> <p>8.1.2 Non-conductive portion:</p>  <table><tr><td>y: Chip width</td><td>x: Chip length</td><td>z: Chip thickness</td></tr><tr><td>$y \leq L$</td><td>$x \leq 1/8a$</td><td>$0 < z \leq t$</td></tr></table> <p>⊙ If there chipped area touches the ITO terminal, over 2/3 of the ITO must remain and be inspected according to electrode terminal specifications. ⊙ If the product will be heat sealed by the customer, the alignment mark must not be damaged.</p> <p>8.1.3 Substrate protuberance and internal crack</p>  <table><tr><td>y: width</td><td>x: length</td></tr><tr><td>$y \leq 1/3L$</td><td>$X \leq a$</td></tr></table>	y: Chip width	x: Chip length	z: Chip thickness	$y \leq 0.5\text{mm}$	$x \leq 1/8a$	$0 < z \leq t$	y: Chip width	x: Chip length	z: Chip thickness	$y \leq L$	$x \leq 1/8a$	$0 < z \leq t$	y: width	x: length	$y \leq 1/3L$	$X \leq a$	2.5
		y: Chip width	x: Chip length	z: Chip thickness															
		$y \leq 0.5\text{mm}$	$x \leq 1/8a$	$0 < z \leq t$															
y: Chip width	x: Chip length	z: Chip thickness																	
$y \leq L$	$x \leq 1/8a$	$0 < z \leq t$																	
y: width	x: length																		
$y \leq 1/3L$	$X \leq a$																		

NO	Item	Criterion	AQL
09	Cracked glass	The LCD with extensive crack is not acceptable.	2.5
10	Backlight elements	10.1 Illumination source flickers when lit. 10.2 Spots or scratches that appear when lit must be judged. Using LCD spot, lines and contamination standards. 10.3 Backlight doesn't light or color is wrong.	2.5 2.5 0.65
11	Bezel	Bezel must comply with product specifications.	2.5
12	PCB、COB	12.1 COB seal may not have pinholes larger than 0.2mm or contamination. 12.2 COB seal surface may not have pinholes through to the IC. 12.3 The height of the COB should not exceed the height indicated in the assembly diagram. 12.4 There may not be more than 2mm of sealant outside the seal area on PCB. And there should be no more than three places. 12.5 Parts on PCB must be the same as on the production characteristic chart, There should be no wrong parts, missing parts or excess parts. 12.6 The jumper on the PCB should conform to the product characteristic chart.	2.5 2.5 2.5 2.5 0.65 0.65
13	FPC	13.1 FPC terminal damage \leq 1/2 FPC terminal width and can not affect the function , we judge accept. 13.2 FPC alignment hole damage \leq 1/2 alignment area and can not affect the function , we judge accept.	2.5 2.5
14	Soldering	14.1 No cold solder joints, missing solder connections, oxidation or icicle. 14.2 No short circuits in components on PCB or FPC.	2.5 0.65

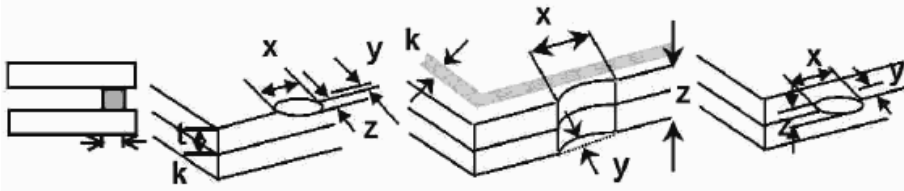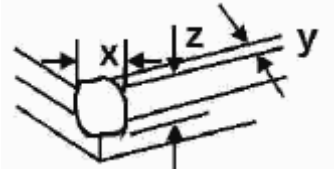NO	Item	Criterion	AQL												
15	Touch Panel Chipped glass	<div> <div> <div>Symbols:</div> <div> <div>x: Chip length</div> <div>y: Chip width</div> <div>z: Chip thickness</div> <div>k: Seal width</div> <div>t: Touch Panel Total thickness</div> <div>a: LCD side length</div> <div>L: Electrode pad length</div> </div> </div> <div> <div>15.1 General glass chip:</div> <div>15.1.1 Chip on panel surface and crack between panels:</div> <div>  </div> </div> <div> <table> <tr> <td>z: Chip thickness</td> <td>y: Chip width</td> <td>x: Chip length</td> </tr> <tr> <td>$Z \leq t$</td> <td>$\leq 1/2 k$ and not over viewing area</td> <td>$x \leq 1/8a$</td> </tr> </table> <div> <div>⊙ Unit: mm</div> <div>⊙ If there are 2 or more chips, x is the total length of each chip</div> </div> <div> <div>15.1.2 Corner crack:</div> <div>  </div> </div> <div> <table> <tr> <td>z: Chip thickness</td> <td>y: Chip width</td> <td>x: Chip length</td> </tr> <tr> <td>$z \leq t$</td> <td>$\leq 1/2 k$ and not over viewing area</td> <td>$x \leq 1/8a$</td> </tr> </table> <div> <div>⊙ Unit: mm</div> <div>⊙ If there are 2 or more chips, x is the total length of each chip</div> </div> </div> </div> </div>	z: Chip thickness	y: Chip width	x: Chip length	$Z \leq t$	$\leq 1/2 k$ and not over viewing area	$x \leq 1/8a$	z: Chip thickness	y: Chip width	x: Chip length	$z \leq t$	$\leq 1/2 k$ and not over viewing area	$x \leq 1/8a$	2.5
z: Chip thickness	y: Chip width	x: Chip length													
$Z \leq t$	$\leq 1/2 k$ and not over viewing area	$x \leq 1/8a$													
z: Chip thickness	y: Chip width	x: Chip length													
$z \leq t$	$\leq 1/2 k$ and not over viewing area	$x \leq 1/8a$													

NO	Item	Criterion		AQL
16	Touch Panel(Fish eye)	SIZE(mm)	Acceptable Q'ty	2.5
		$L \leq 0.7$	Accept no dense	
		$L > 0.7\text{mm}$	0	
				
17	Touch Panel Newton ring	Newton ring dimension $\leq 1/2$ touch panel area and not affect font and line distortion($\leq 2.5\%$) , it is acceptable.		2.5
18	Touch Panel Linearity	Less than 2.5% is acceptable.		2.5
19	LCD Ripple	Touch the touch panel , can not see the LCD ripple. Pen: R 1.0mm silicon rubber. Operation Force: 80g		2.5
20	General appearance	20.1 Pin type must match type in specification sheet.		0.65
		20.2 LCD pin loose or missing pins.		0.65
		20.3 Product packaging must the same as specified on packaging specification sheet.		0.65
		20.4 Product dimension and structure must conform to product specification sheet.		0.65

13. Handling Precaution:

13-1 Handling of LCM

- Don't give external shock.
- Don't apply excessive force on the surface.
- Liquid in LCD is hazardous substance. Must not lick and swallow. when the liquid is attach to your hand, skin, cloth etc. Wash it out thoroughly and immediately.
- Don't operate it above the absolute maximum rating.
- Don't disassemble the LCM.
- The operators should be grounded whenever he/she comes into contact with the module. Never touch any of the conductive parts such as the LSI pads, the copper leads on the PCB and the interface terminals with any parts of the human body.
- The modules should be kept in antistatic bags or other containers resistant to static for storage.
- The module is coated with a film to protect the display surface. Be care when peeling off this protective film since static electricity may be generated.

13-2 Storage

- Store in an ambient temperature of $25\pm 10^{\circ}\text{C}$, and in a relative humidity of $50\pm 10\%\text{RH}$. Don't expose to sunlight or fluorescent light.
- Storage in a clean environment, free from dust, active gas, and solvent.
- Store in anti-static electricity container.
- Store without any physical load.
- Appearance, 3months; Function, 1year; within the validity, failed CTP can be replaced 1 to 1

13-3 Soldering

- Use only soldering irons with proper grounding and no leakage.
- Iron: No higher than $280\pm 10^{\circ}\text{C}$ and less than 3 sec during Hand soldering.
- Rewiring: no more than 2 times.

14. Guarantee:

Our products meet requirements of the environment.

YEEBO ROHS requirement is based on European Union Directive 2011/65/EU (ROHS) Requirements and Update.